


TRANSMITTER STINGRAY 295SEPAxV



Manual

Community
Controls

 **Stingray**

Thank you for choosing a Community Controls product.
Please read this manual carefully before using the product.

Made in Italy Copyright© 2006 by Community Controls.

CONTENTS

1 - TRANSMITTER INTRODUCTION

- 1A - General information
- 1B - Technical specifications
- 1C - Main features

1D-Types

2 - NUMBERING

3 - PROGRAMMING

4 - OPERATION

5 - BATTERY ACCESS

6 - TROUBLESHOOTING

1A - General information

Community Controls - Stingray 295SEPAxV is a visor transmitter operating at 295MHz in ASK modulation. It has been designed for use with programmable telephone entry, security, and access control systems operating with a 295MHz frequency receiver.


The protocol is AUTOkey compatible and the code sent by the transmitter includes a 24 bit security code which allows up to

16,777,216 code combinations. Each transmitter is individually numbered, can be used with any receiver capable of receiving a 33 bit input and can operate any type of access control system equipped with the same protocol. The 23A alkaline battery has a life of about 12-18 months. *The product fully complies Part 15 of FCC Regulations.*

1B - Technical specifications

Number of keys:	1 / 2
Supply :	1 Alkaline Battery 12V type 23A
Battery life:	12 - 18 months
Current consumption :	20 mA
Operating frequency :	295 MHz
Code combinations :	16,777,216
Modulation :	AM / ASK
Rated e.r.p. :	50 - 100 mW
Range in free space:	60 - 120 yd
Operating temperature:	-20 ÷ +55 °C
Overall dimensions:	3.26 x 1.88 x 0.62 in
Weight:	20 gr.

1C - Main features

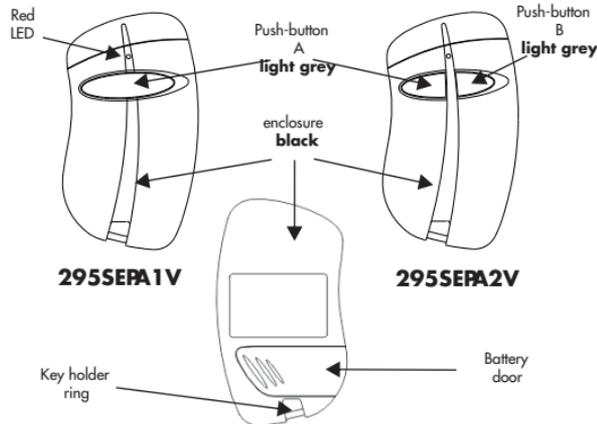

ID - Types

STINGRA Y 295SEP A1V : 1 button transmitter
STINGRA Y 295SEP A2V : 2 button transmitter

2 - NUMBERING

Each transmitter is manufactured and sold with a different factory set sequence number and facility code.

3 - PROGRAMMING


The transmitter facility code and sequence number must be programmed into your system memory. Your own installer or reseller will provide you the necessary instructions for your system.

4 - OPERATION

- Firmly depress either button until the small red LED illuminates.
- After the LED has illuminated, release the button. If the device you are attempting to activate does not respond, repeat steps a. and b. or consult section 6 (Troubleshooting) of this manual.

5 - BATTERY ACCESS

To access the battery slide out the battery door
Place the 23A alkaline battery between the 2 contacts.
Respect the right polarity as indicated on the bottom of the box.
NOTE: Please dispose of the batteries properly according to local laws and regulations.
Test proper battery installation by verifying that the red LED illuminates when either button is pushed.



6 - TROUBLESHOOTING

FAULT	SOLUTION
The system does not receive the transmitter signal. The transmitter LED will not light	Replace the transmitter batteries
The system does not receive the transmitter signal. The transmitter LED is ON	Check to verify the transmitter is programmed into your system
The operating range is reduced	Replace the transmitter batteries

Community Controls FCC ID : SU7295SEPCV

*This device complies with Part. 15 of the FCC Rules
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept interference received, including interference that may cause undesired operation.*

Notice

Any changes or modification to Community Controls equipment not expressly approved by Community Controls could void the manufacturer's warranty and the user's authority to operate this product.

WARRANTY

*The warranty period of Community Controls 295 transmitters is 60 months, beginning from the manufacturing date of the transmitter. During this period, if the product does not operate correctly, due to a defective component, the product will be repaired or replaced at the sole discretion of Community Controls
The warranty does not extend to the transmitter case which can be damaged by conditions outside the control of Community Controls or to battery life.*



COMMUNITY CONTROLS
2500 South 3850 West, Suite A
Salt Lake City, UT 84120
(800) 284-2837 - (866) 867-3637 Fax
www.communitycontrols.com